

## Feeding...

## Scalping...

## Conveying...

### State of the art

The ViPower range of SRP vibratory scalping screeners, feeders and conveyors offer a unique combination of power and efficiency. Unlike almost all other electro-mechanical designs, all models in the SRP range employ only a single motor and yet produce a highly responsive linear motion.

The high frequency low amplitude motion ensures sufficient power to start under full load conditions, and yet is remarkably gentle on more friable products.

Employed in a wide range of industries from pet food through to metals, the SRP range of vibratory feeders, screeners and conveyors are the cost effective alternative to traditional electro-mechanical and electro-magnetic types.



### Flexibility

Units are available with capacities of up to 35M<sup>3</sup>/hour and up to 3 meters in length. A wide range of options is available including covers, discharge chutes and support stands. All models are available in mild steel or with 304 stainless steel contact parts.

### Reliability

All machines within the ViPower SRP range come complete with a 12 month mechanical warranty. Laser profiling and "slot & tab" construction are extensively employed in our designs, ensuring optimum simplicity and durability. All major components such as motors and isolators, have an expected working life in excess of 30,000 hours.


### Precision

For applications where variable or metered feeds are required, the SRP range can be operated in conjunction with an electronic frequency inverter control. A wide and flexible range of flow rates can be achieved, from 100% down to stall.




ViPower Europe BV  
 Waardsedijk-oost 6a  
 3417 XJ Montfoort  
 The Netherlands  
 Ph.: +31 (0)348 413405  
 Fax +31 (0)348 431378  
 Email: info@vipower.nl

# Single Rotary Powered

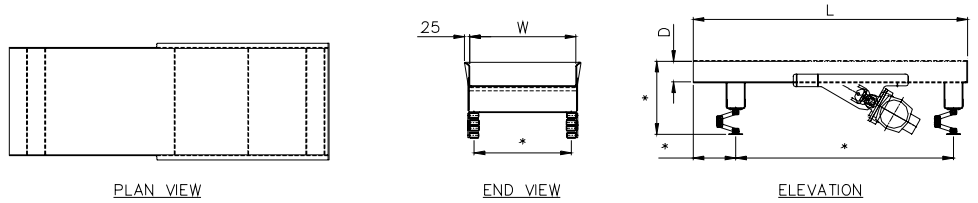


\*=DIMENSIONS ON REQUEST

MACHINE REF:	'W'-WIDTH	'L'-LENGTH	'D'-DEPTH	CAPACITY M <sup>3</sup> /HOUR	kw	WEIGHT kg
SRPC25/12-18	250	1200-1800	75	5	0.27	45-53
SRPC50/12-15	500	1200-1500	75	10	0.51	54-66
SRPC50/15-20	500	1500-2000	75	10	0.51	66-82
SRPC50/20-25	500	2000-2500	75	10	0.51	82-98

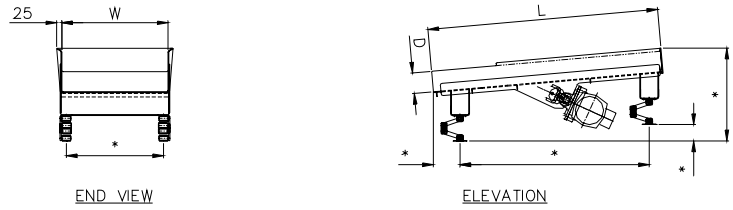


\*=DIMENSIONS ON REQUEST

MACHINE REF:	'W'-WIDTH	'L'-LENGTH	'D'-DEPTH	CAPACITY M <sup>3</sup> /HOUR	kw	WEIGHT kg
SRPF25/65-15	250	650-150	150	10	0.19	38
SRPF40/65-15	400	650-150	150	16	0.27	41
SRPF65/80-20	650	800-200	200	35	0.27	61

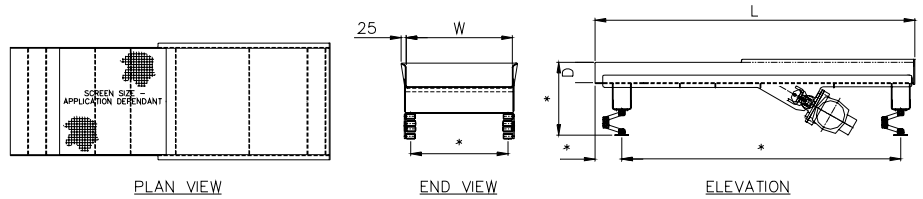

\*=DIMENSIONS ON REQUEST

MACHINE REF:	'W'-WIDTH	'L'-LENGTH	'D'-DEPTH	CAPACITY M <sup>3</sup> /HOUR	kw	WEIGHT kg
SRPS25/12-18	250	1200-1800	75	5	0.27	45-53
SRPS50/12-15	500	1200-1500	75	10	0.51	54-66
SRPS50/15-20	500	1500-2000	75	10	0.51	66-82
SRPS50/20-25	500	2000-2500	75	10	0.7	82-98

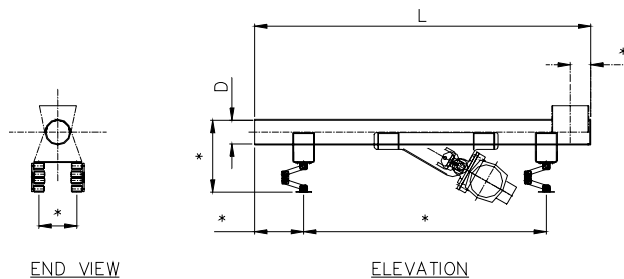

\*=DIMENSIONS ON REQUEST

MACHINE REF:	'D'-DIAMETER	'L'-LENGTH	CAPACITY M <sup>3</sup> /HOUR	kw	WEIGHT kg
SRPT10/12-18	100	1200-1800	5	0.27	33-42
SRPT15/12-15	150	1200-1500	12	0.51	47-54
SRPT20/15-20	200	1500-2000	20	0.7	66-83
SRPT20/20-25	200	2000-2500	20	0.7	83-100